
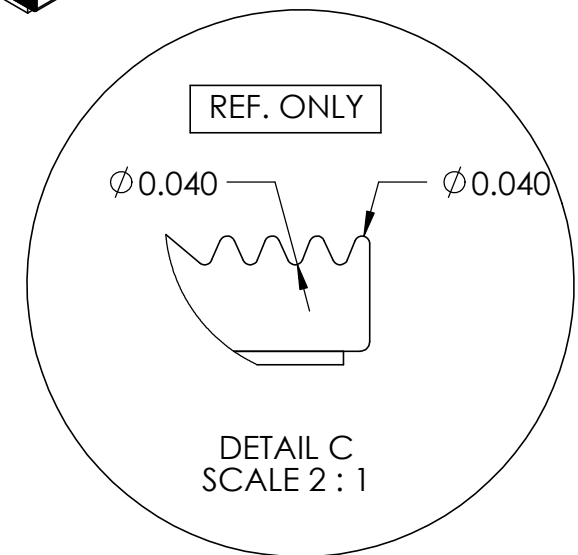
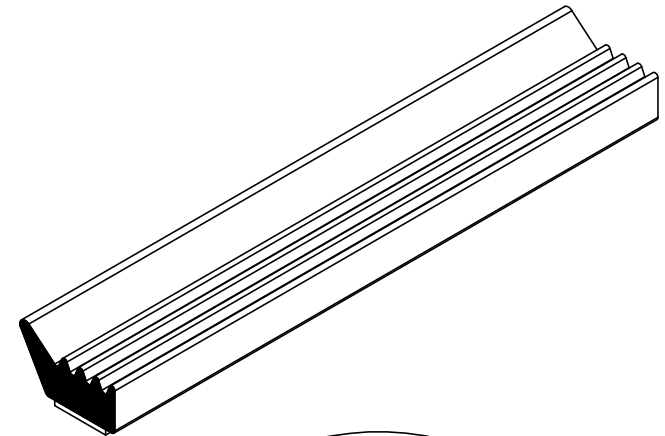


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.250 G/CM³)
- 2) 3/8" ST-1200 3M HEAT ACTIVATED TAPE (0.006 LB/FT)
- 3) SLIP COAT

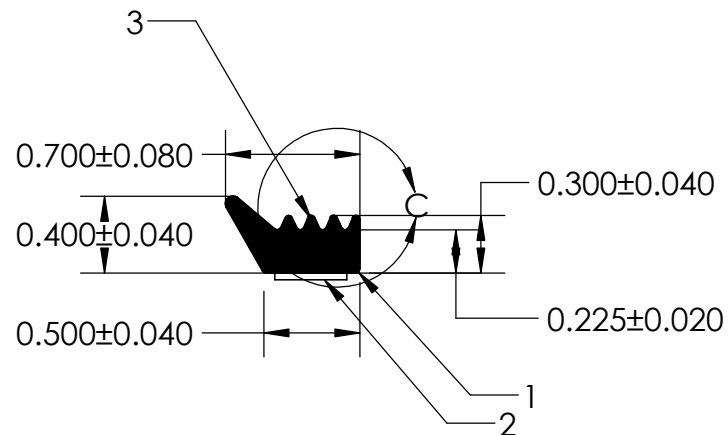

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:			
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 2		TS-212		
A	8/21/23	C.V.	UPDATED FROM CLASS 1 TO CLASS 2 TOLERANCES		WEIGHT 0.025 LB/FT				
B					ASTM D1056 2A2		SIZE A	DWG. NO. UG-1-TS-375-TP-212	REV A
C					ASTM D2000 N/A				
D					DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(080918)				
E									
P:\Engineering\Prints\Master Prints\Tape Seals\TS-212 UG-1-TS-375-TP-212					SCALE: 1:1	DR. BY C. VENT		DATE 3/7/2022	SHEET 1 OF 1